


SIDRA® SUSPENSIONS SOSPENSIONI SIDRA®

TYPE - TIPO	9000	9000S	12000	14000
MAX LOADING CAPACITY @ 40 km/h [kg] <i>Portata massima @ 40 km/h [kg]</i>	9000	9000	12000	14000
TRACK LENGTH [mm] <i>Larghezza carreggiata [mm]</i>	1950/2000	1950/2000	2000/2150	2060/2100/2500
NOMINAL HEIGHT [mm] <i>Altezza nominale [mm]</i>	355	355	400	450
MAXIMUM AMPLITUDE [mm] <i>Massima escursione [mm]</i>	±110	±110	±125	±140
MAX TYRE WIDTH [mm] <i>Larghezza massima pneumatico [mm]</i>	600	600	700	750
BRAKE AND CAMSHAFT TYPE <i>Tipo freno e camma</i>	400Gx80 "0"	400Gx120 "8"	400Gx120 "8"	412Gx160 "8"
HUB TYPE <i>Mozzo</i>	32214 - 32217	32214 - 32217	33213 - 32218	32218 - 32221
MODULE WEIGHT [kg] <i>Peso del modulo [kg]</i>	FIXED/Fisso 480 STEERING/ Sterzante 580	FIXED/Fisso 530 STEERING/ Sterzante 660	FIXED/Fisso 620 STEERING/ Sterzante 770	FIXED/Fisso 800 STEERING/ Sterzante 920

SIDRA® fixed module
Modulo fisso SIDRA®

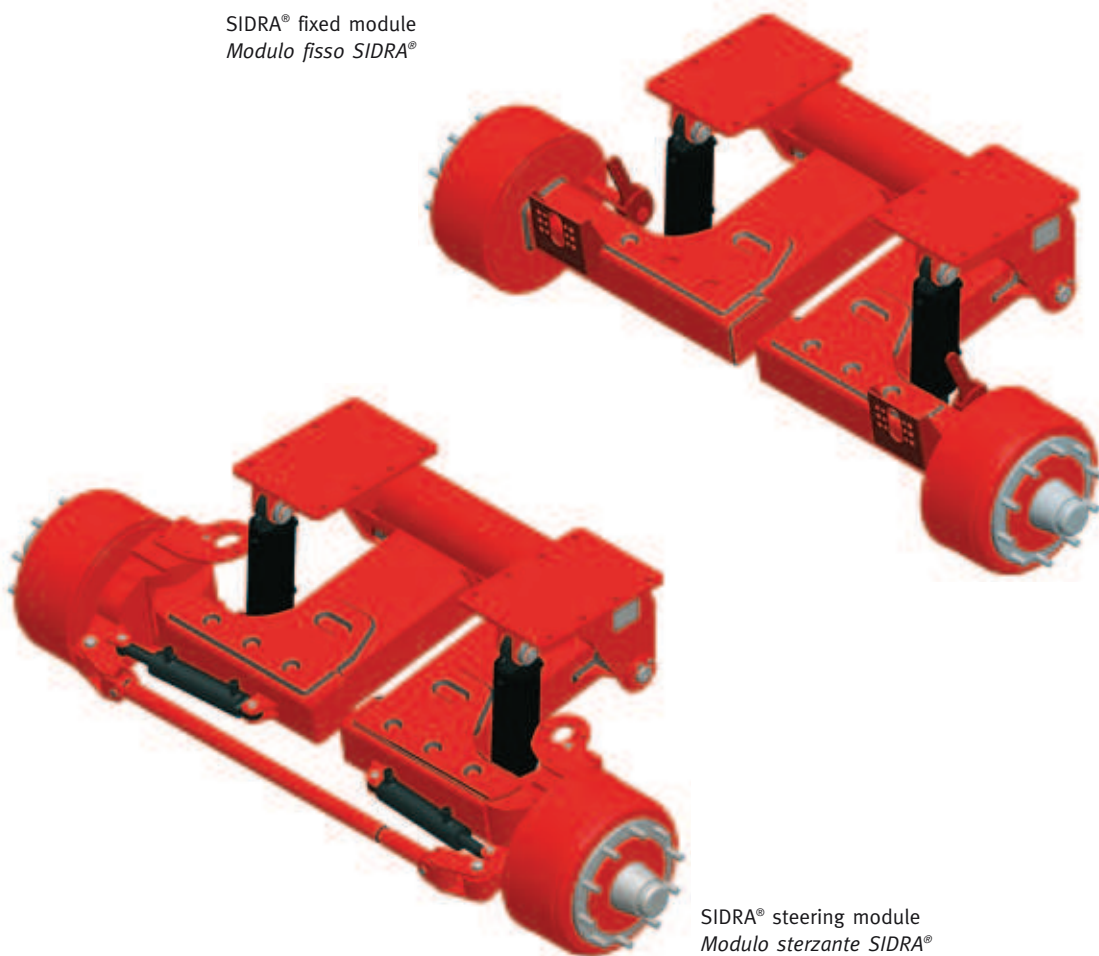

SIDRA® steering module
Modulo sterzante SIDRA®